


# MABUCHI Small DC EG-530KD



## DIMENSIONS

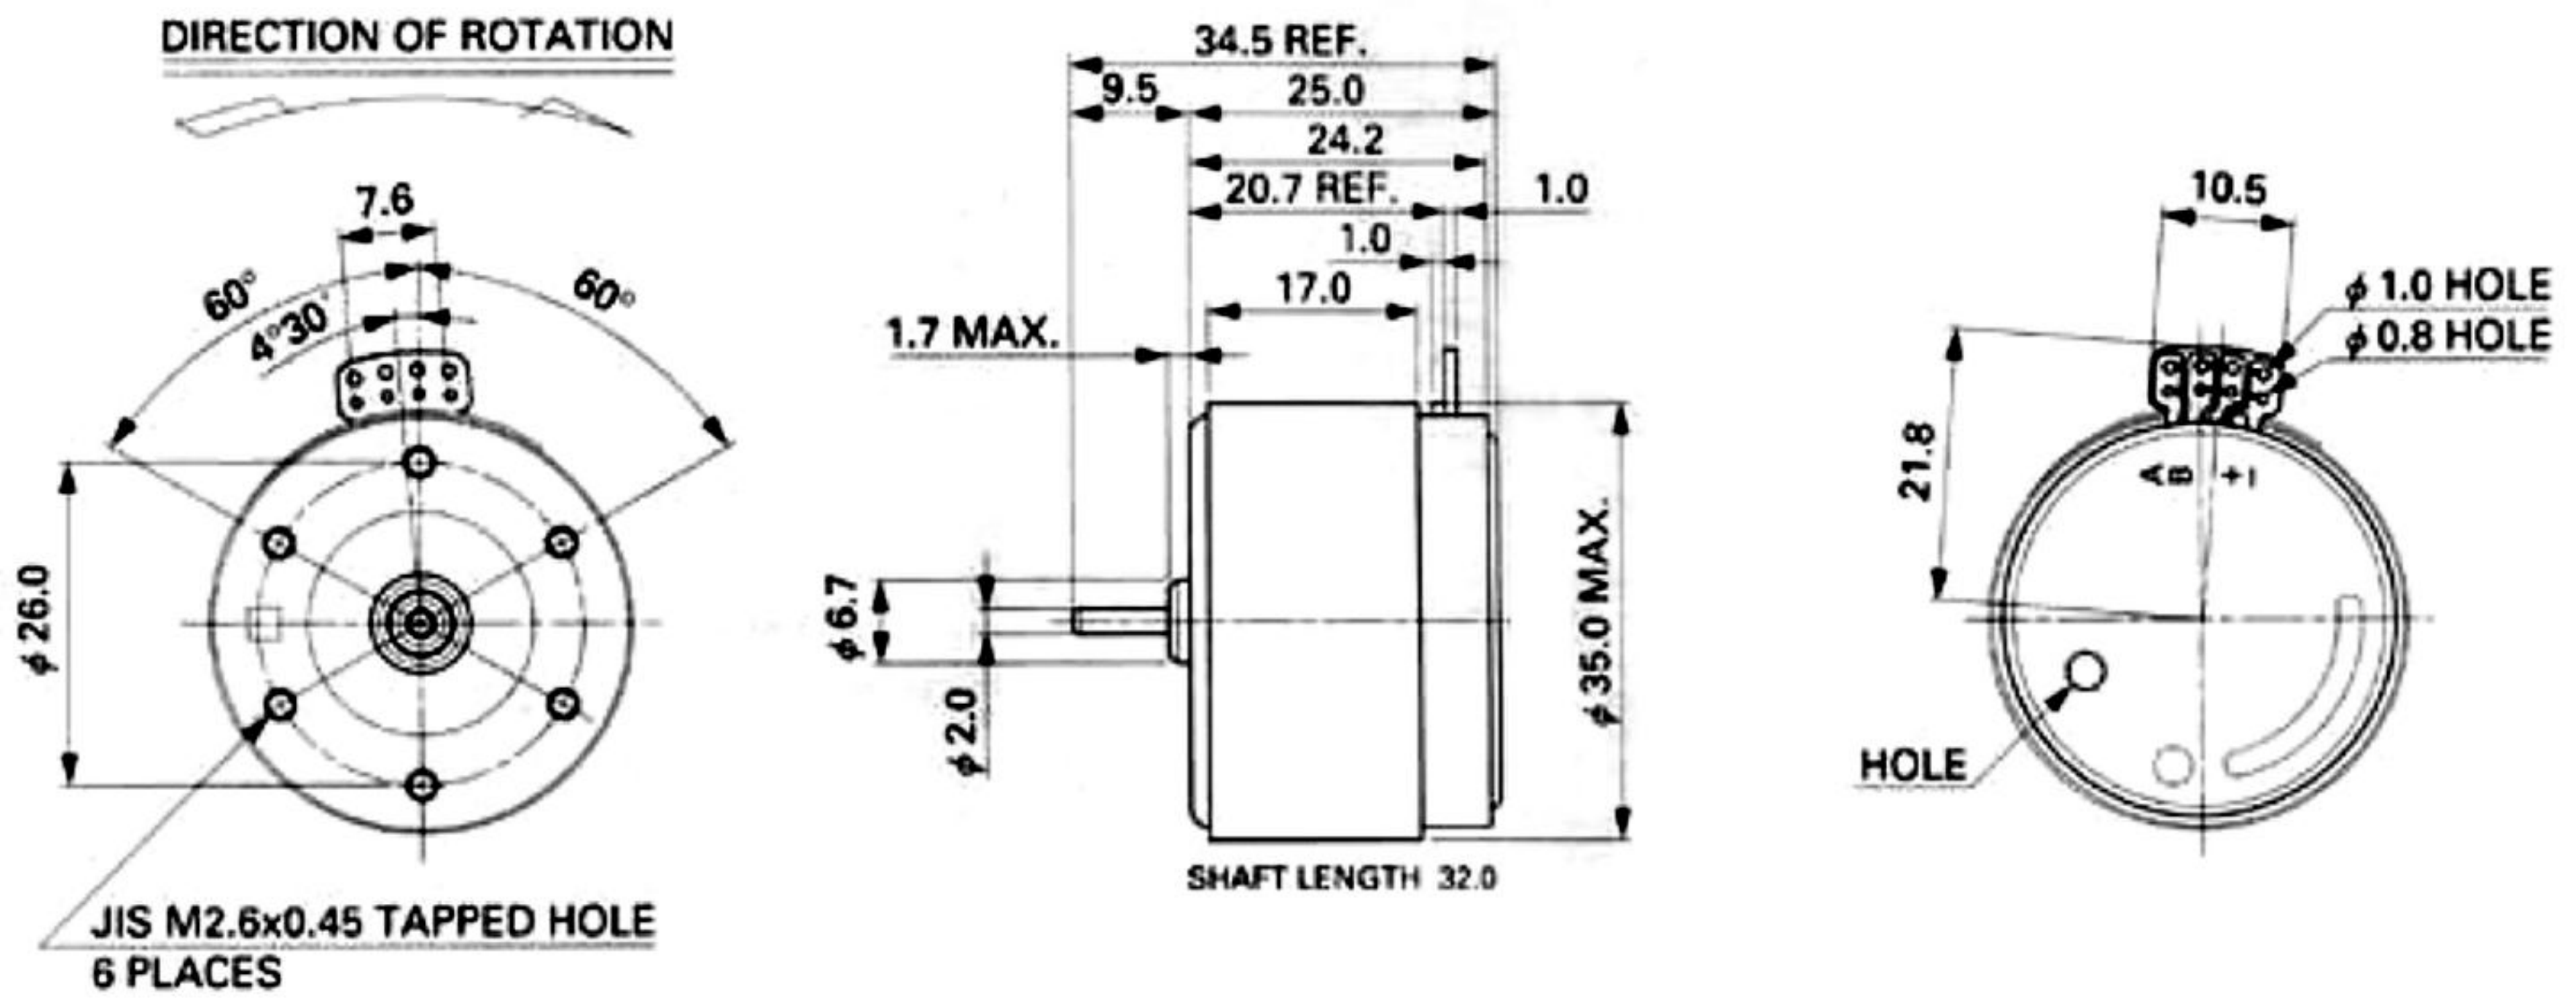

## SPECIFICATION

MODEL	RATED VOLTAGE	WORKING VOLTAGE	RATED LOAD		RATED SPEED	RATED LOAD CURRENT	LOAD FLUCTUATION(TYP)	STARTING TORQUE(MIN)	
	V	V	g·cm	mN·m	r/min	mA(TYP)	r/min / g·cm	g·cm	mN·m
EG-530KD-9F (9B)	9	6.3~11.7	10	0.98	1600	109	5.0	40	3.92
					3200	116	7.0		
EG-530KD-2F (2B)	12	8.4~15.6	10	0.98	1600	83	5.0	50	4.90
					3200	89	7.0		