


MABUCHI Small DC

RF-J20WA



DIMENSIONS

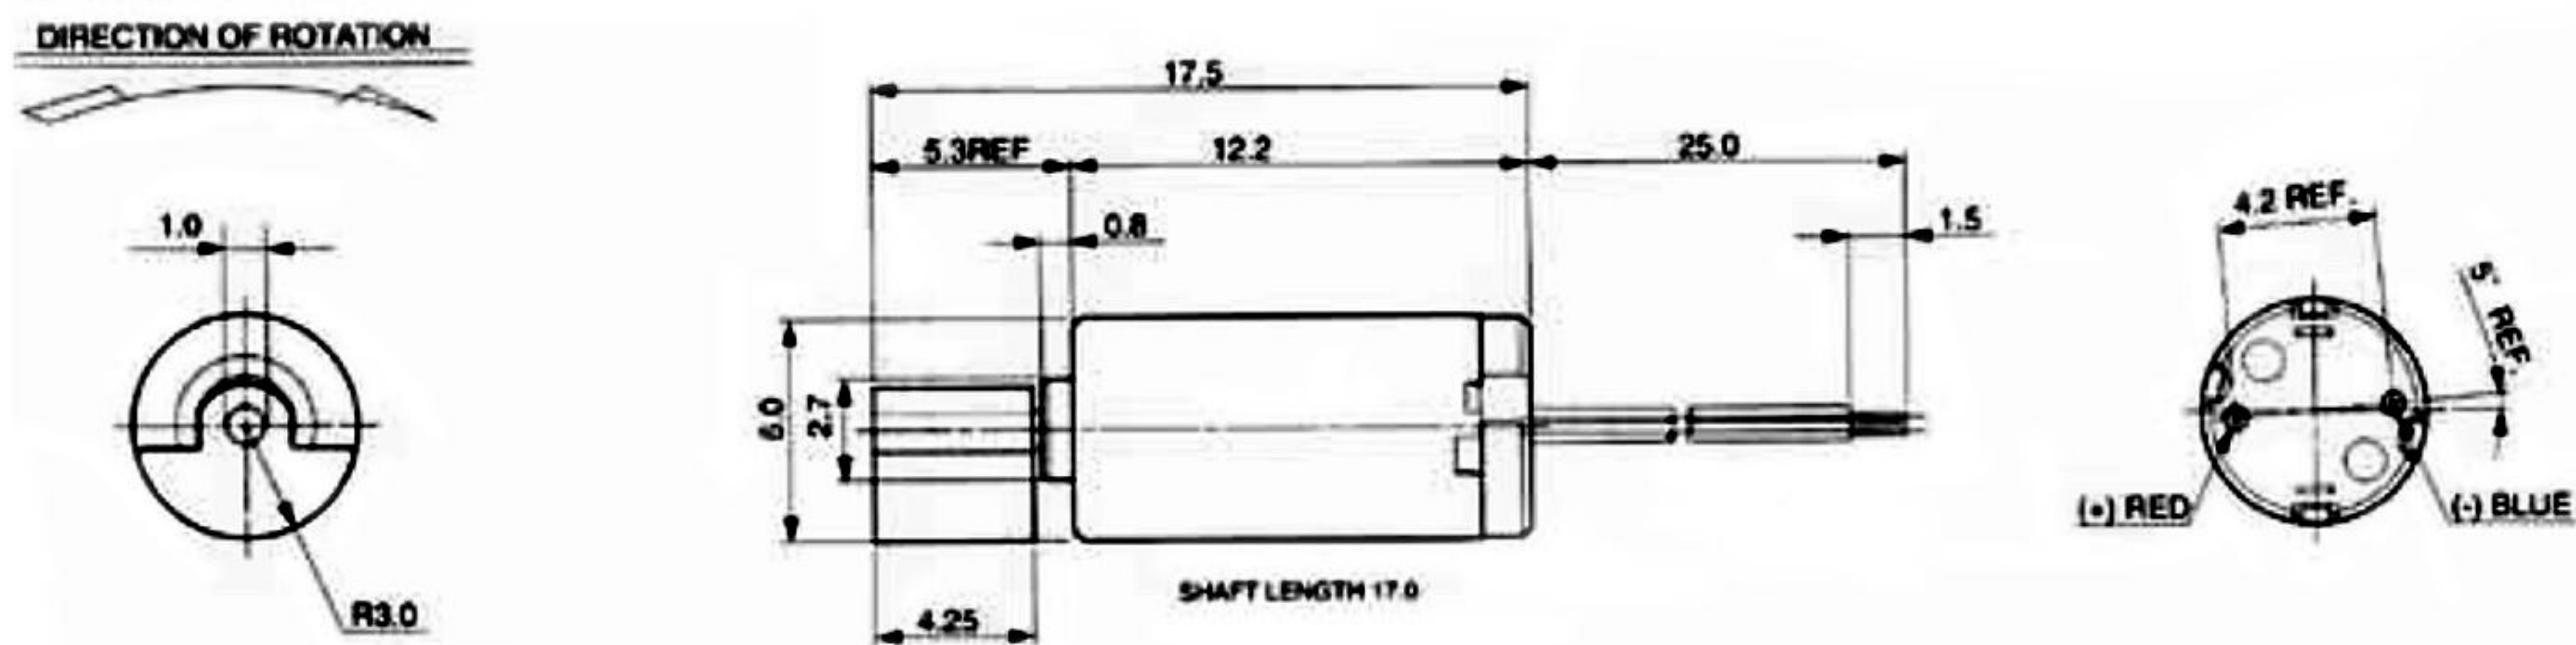

SPECIFICATION

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	g·cm	mN·m	W	g·cm	mN·m	A
RF-J20WA-5Z145	1.1~2.0	1.3V CONSTANT	12900	0.028	8700	0.059	0.1	0.01	0.009	0.6	0.06	0.13

MODEL	RATED VOLTAGE	RATED SPEED	RATED CURRENT	STARTING VOLTAGE	STARTING CURRENT
	V	r/min	mA	V	mA
RF-J20WA-5Z145	1.3V CONSTANT	7400	68	0.48	130