


# MABUCHI Small DC RS-750SH/VF



## DIMENSIONS

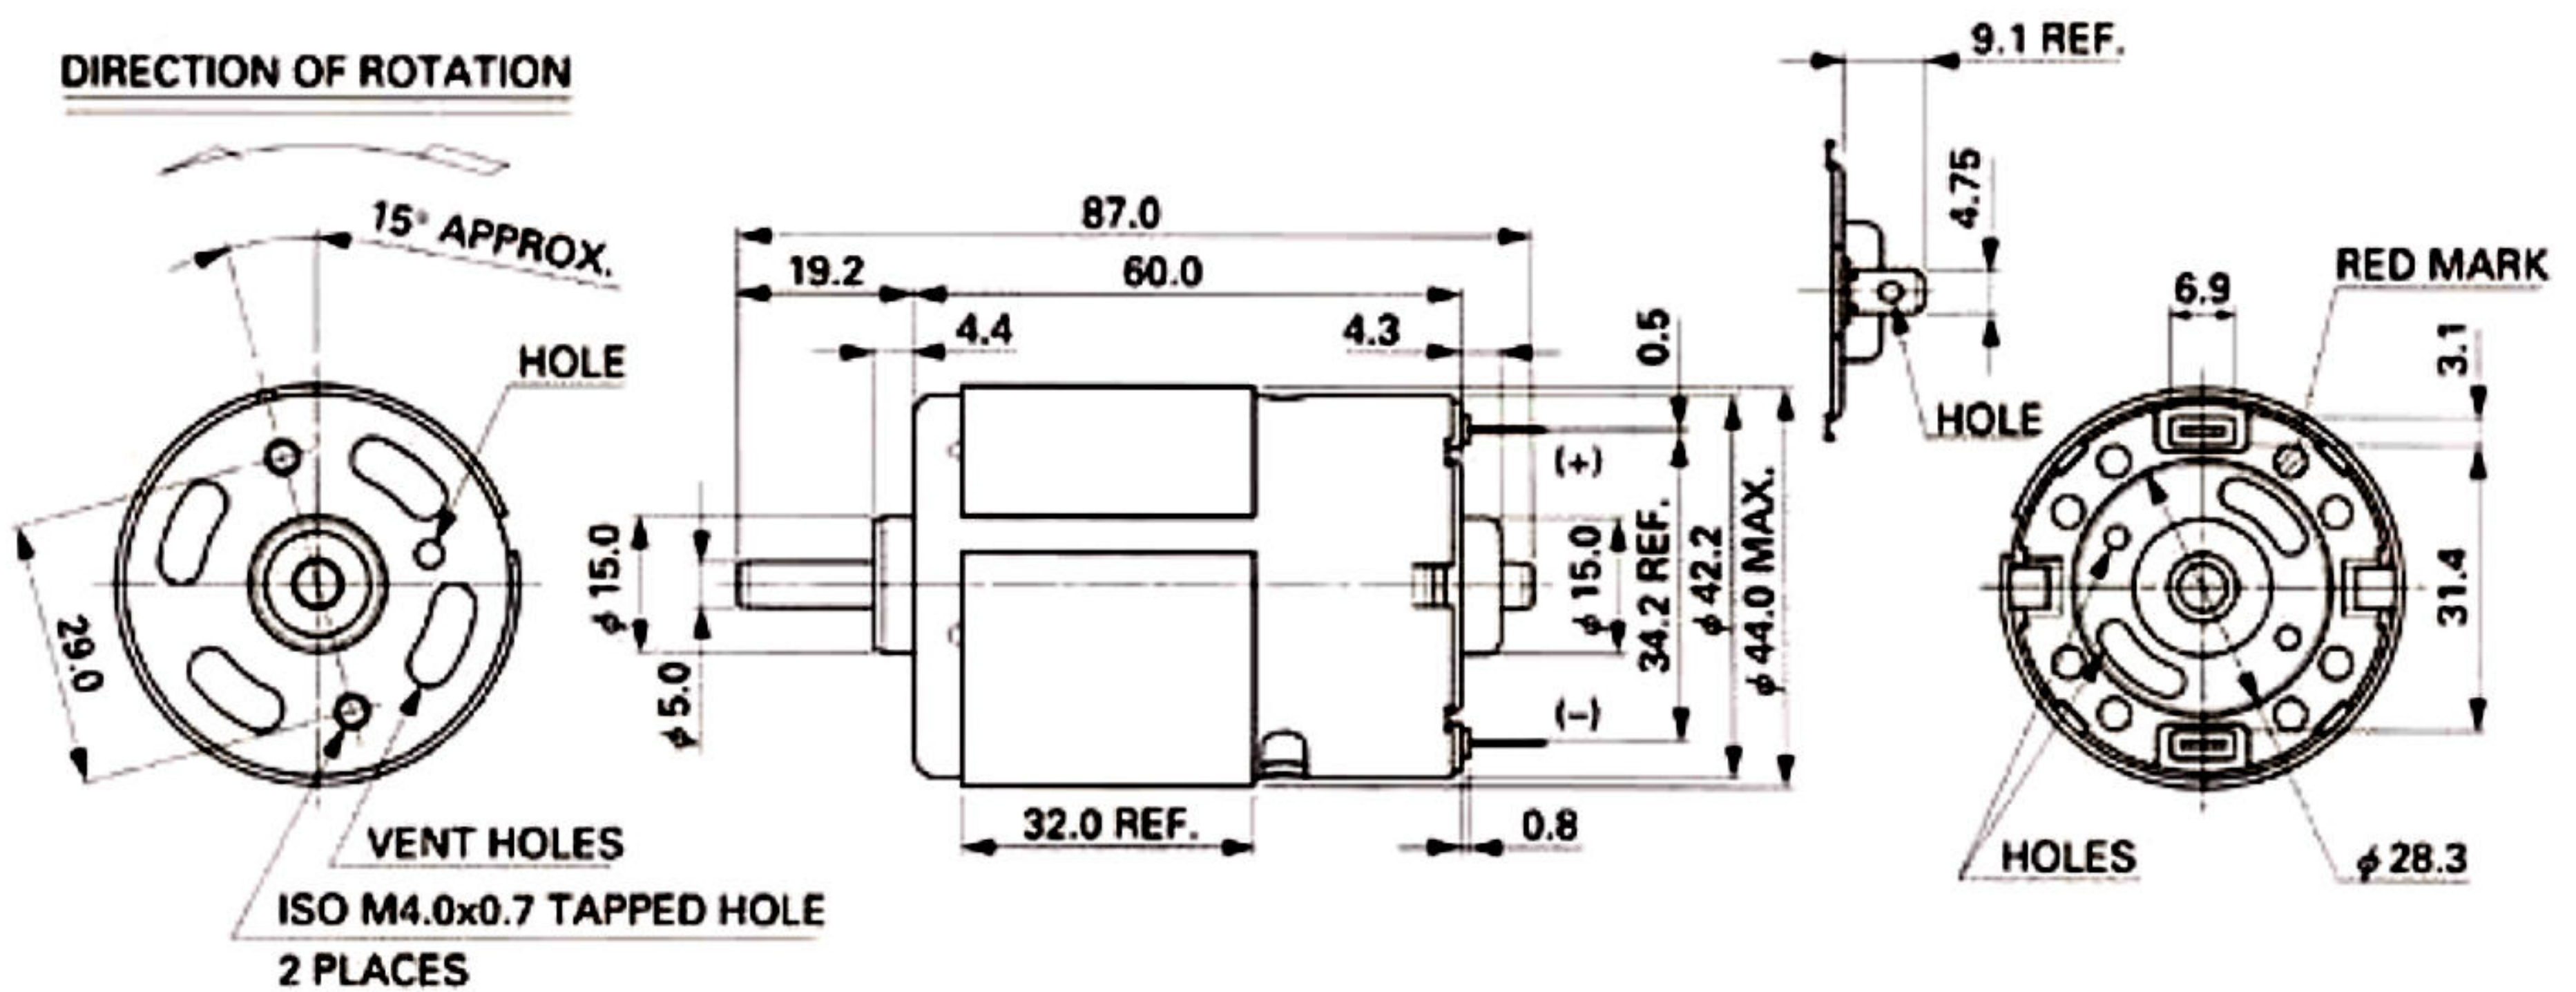

## SPECIFICATION

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	g-cm	mN·m	W	g-cm	mN·m	A
RS-750SH-8027	6~12	9.6V CONSTANT	18600	1.95	15900	11.8	520	51.0	84.8	3650	358	71.0
		12V CONSTANT	22500	2.30	19300	14.4	620	60.8	123	4550	446	90.0
RS-750SH-8523	4.8~9.6	6V CONSTANT	13200	1.95	11400	12.5	473	46.4	55.3	3500	343	80.0
RS-750VF-7034	7.2~15	9.6V CONSTANT	12200	1.90	10400	11.5	720	70.6	76.8	5100	500	69.0
		12V CONSTANT	15200	2.00	13100	13.1	840	82.3	113	6350	622	86.0
RS-750VF-8522	6~12	12V CONSTANT	23500	3.70	20100	22.3	930	91.1	192	6600	647	135